

INSTRUCTION MANUAL

EN

Dear customer

Thank you very much for purchasing Carrello product. We assure you that in the development process of the car seat we focused on safety, comfort and user friendliness. The product is manufactured under special quality surveillance and complies with the strictest safety requirements.

WARNING! For proper protection of your child, it is essential to use and install the car seat according to the instructions given in this manual.

NOTE! The newborn inlay protects your child. It must be used up to size of 60 cm.

IMPORTANT! Read carefully before use and keep for future reference

Warning

The instruction manual should be kept safely with the child restraint system for its life period.

IMPORTANT! This child restraint system must always be used in a rearward facing position.

WARNING! Never keep a baby on your lap in a vehicle. The forces released in a collision are too high. Never use a single vehicle safety belt to restrain yourself and the child.

WARNING! Never buy a second-hand baby car seat / i-Size Base.

WARNING! Never leave the child unattended in the seat for any reason. Do not leave the child unattended in the car even for short periods. The temperature of the passenger compartment can change suddenly and become dangerous for the child inside.

WARNING! Please never leave your baby unattended in a vehicle. Take your baby out of the infant car seat as often as possible in order to relieve pressure from his or her spine. Take breaks during longer car journeys for this purpose. Also ensure that you do not leave your baby for too long in the infant car seat even when not in the vehicle.

WARNING! The car seat / i-Size Base must always be secured correctly in the vehicle even when not in use. In case of an emergency brake or accident, an unsecured car seat / i-Size Base may injure other passengers or yourself.

WARNING! Do not use the baby car seat / i-Size Base if it has failures or missing pieces or if it has been subjected to violent stresses in an accident.

WARNING! Traces of use and/or discoloration can appear on some vehicle seats made from delicate materials (e.g. velour, leather, etc.) if car seats / i-Size Base are used.

WARNING! Check the compatibility with ISOFIX restraint systems is indicated in the vehicle's manual and maintenance manual.

WARNING! Don't let children make adjustments with the i-Size base.

WARNING! Do not use installation methods other than those indicated.

WARNING! Make sure the folding seats are securely locked.

WARNING! Do not install the baby car seat / i-Size Base on the seats facing the opposite direction.

WARNING! Make sure the baby car seat / i-Size Base is not blocked by the door or a foldable seat.

WARNING! Do not modify, dismantle or add to any part of the base or infant carrier.

WARNING! Always secure your child with the safety harness.

WARNING! An accident may cause damage to the baby car seat / i-Size Base that is not visible to the naked eye. The baby car seat / i-Size Base is not suitable for further use after a car accident.

WARNING! Always ensure that the infant car harness is correctly tensioned to ensure maximum protection for your child.

WARNING! Security is only guaranteed if the base and infant carrier are fitted in accordance with these instructions.


WARNING! Safely secure any luggage or other objects that might cause injuries to the child in the event of a collision.

WARNING! Never use the car seat on a vehicle seat with an activated front airbag. This does not apply to so-called side airbags. **NOTE!** The large-volume front airbag expands explosively and may cause your child serious injury.

WARNING! The plastic parts of the infant car seat heat up in the sun. Your baby can suffer burns from this. Protect your baby and the infant car seat from intense sun exposure (e.g. by placing a light cloth over the seat).

INSTRUCTION MANUAL

Correct position in the vehicle



This is a Universal Belted Enhanced Child Restraint System.

It is approved according to UN Regulation No.129 for children between 40 and 87 cm and a maximum weight of 13 kg, for use in "Universal seating positions" as indicated by vehicle manufacturer in the vehicle user's manual.

When used in combination with the i-Size base, this is i-Size Enhanced Child Restraint System.


It is approved according to UN Regulation No.129 for children between 40 and 87 cm and a maximum weight of 13 kg, suitable for car seats compatible with "i- Size" as indicated by the vehicle manufacturer in the use and maintenance booklet.

Refer to the vehicle instruction manual with regards to the use of car seats, check whether the compatibility with ISOFIX retention systems is indicated in the vehicle's manual and maintenance manual.

If in doubt, consult the Enhanced Child Restraint System manufacturer or the retailer. Always check before buying the infant car seat whether the seat can be properly installed in your vehicle.

NOT TO USE REARWARD FACING ECRS IN SEATING POSITIONS WHERE THERE IS AN ACTIVE FRONTAL AIRBAG INSTALLED.

Adjusting the carrying handle




You can lock the carrying handle(1) in place in 3 positions:

A: Carrying / Car position.

B: For placing the baby in the seat.

C: For a safe stand on a level surface outside the vehicle.

! WARNING! In order to prevent the seat from tipping over during carrying, check whether the carrying handle (1) is locked in place in carrying position A.




To adjust the carrying handle (1), simultaneously press the left and right buttons (2). Then pivot carrying handle (1) forwards or backwards while pressing buttons (2) until it automatically locks in place in the desired position.

INSTRUCTION MANUAL


EN

Adjusting the sun canopy



Unfold the sun canopy by pulling gradually on the plastic cover. To fold back, push the sun canopy back to its initial position.

Adjusting to body size



Adjusting the Headrest

NOTE! The newborn inlay protects your child. It must be used up to size of 60 cm.



NOTE! The headrest (3) ensures the best possible protection for your child only if it is adjusted to the optimum height. There are 8 height positions that can be set.

The headrest has to be adjusted in a way that the distance between the child's shoulders and the headrest doesn't exceed 2 cm (approx. 2 fingers width).

Check the height of the Harness Straps: Position the Harness Straps at or just below the child's shoulders.

Pull the adjustment handle (4) upwards to unlock the headrest (3). Now you can adjust the headrest.

NOTE! The shoulder belts are firmly connected to the headrest and do not have to be adjusted separately.




Removing the Newborn Inlay

The newborn inlay (5) may be removed after the baby is 61 cm (approx. 3 months) to provide more space for the child. To remove the newborn inlay (5) open and remove the shoulder pads. Then remove the newborn inlay and place the shoulder pads back on the shoulder belts.

INSTRUCTION MANUAL

Strapping with harness system

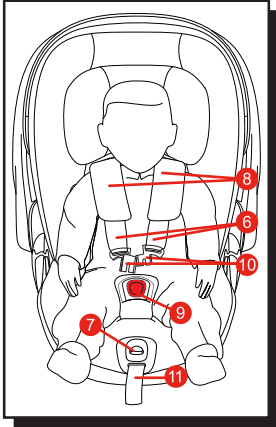

NOTE! Ensure that the headrest is correctly locked in place before using the car seat.

NOTE! Ensure that the car seat is free from toys and hard objects.

The shoulder belts (6) are firmly attached to the headrest and must not be adjusted separately.

Loosen shoulder belts (6) by pressing the adjustment button on central adjuster (7) and simultaneously pulling both shoulder belts up.

NOTE! Please always pull on shoulder belt (6) and not on belt pads (8). Undo the belt buckle (9) by pressing the red button firmly.






NOTE! Ensure that shoulder belts (6) are not twisted.

Put your child into the car seat. Place shoulder belts (6) directly over your child's shoulders. Place both buckle tongues (10) together and lock them in place in belt buckle (9) with an audible "CLICK". Pull cautiously on central adjustment belt (11) in order to tighten shoulder belts (6) until they fit your child's body.

NOTE! For the car seat to offer optimum protection, shoulder belts (6) should fit the body as closely as possible.

To ensure your baby's safety, check that: shoulder belts fit the baby's body closely without constricting the baby and the belt is not twisted, the position of the headrest is correctly adjusted, the height of the harness straps is aligned with the child's shoulders or just below, belt tongues are locked in place in belt buckle.

Installing the infant car seat with vehicle belt



INSTRUCTION MANUAL

EN

Installation

Place the infant car seat facing the rear of the vehicle on the vehicle seat.

Ensure, that the carrying handle (1) is locked in car position A.

Ensure that the installation mark on warning sticker (27), located on the side of the infant car seat, is aligned with the floor of the vehicle.

Pull out the vehicle seat belt and route it over the infant car seat. Place the lap belt (28) into routings (29) on both sides of the infant car seat. Lock the buckle tongue in place in vehicle seat belt (30). Tighten lap belt (28) by pulling on diagonal belt (31) in the direction of the front of the vehicle. Pull diagonal belt (31) behind the head end of the infant car seat.


NOTE! Do not twist the vehicle seat belt while doing this.

Activate the side protector (24) (see chapter «**Adjusting the side protectors**»).

Route diagonal belt (31) through the rear green belt routing (32) and above the unfolded side protector (24). Tighten diagonal belt (31).




WARNING! Diagonal belt (31) must be routed through rear, green belt routing (32) and above the unfolded Linear Side-impact Protection (24).



NOTE! The infant car seat may be used on all vehicle seats with three-point automatic belts according to UN R16. We recommend as a rule that the infant car seat is used in the rear of the vehicle. In most cases, your child is exposed to higher risk in the front



WARNING! The infant car seat is not suitable for use with a two-point or lap vehicle seat belt. Securing with a two-point vehicle seat belt could result in serious injuries to the child in the event of an accident



WARNING! It may be that buckle part of the vehicle seat belt is too long so that it reaches the belt routing of the infant car seat. This means that the infant car seat cannot be fastened tightly. If this is the case, choose another seat in the vehicle for the infant car seat. In case of doubt contact the manufacturer of the infant car seat.

Removal


NOTE! To prevent damage to your car and the car seat, the side protector (24) should be folded back before removing the car seat (see chapter «**Adjusting the side protectors**»).

Take the vehicle seat belt out of the belt routing in the back (32). Open the vehicle belt buckle and take the lap belt out of the belt routings (29).

INSTRUCTION MANUAL

Connecting the infant car seat with base

Components

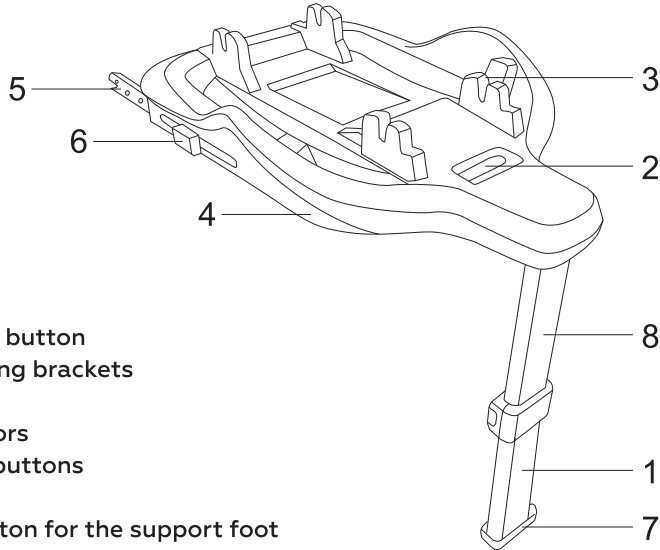


- 1 Support leg
- 2 Car seat release button
- 3 Car seat fastening brackets
- 4 Base
- 5 ISOFIX connectors
- 6 ISOFIX release buttons
- 7 Support foot
- 8 Adjustment button for the support foot

Base Installation


Refer to the car's manual to identify the ISOFIX points in the vehicle.

IMPORTANT! The ISOFIX anchor points are two metal wings for seats and are located between the backrest and the car seat. If in doubt, refer to the instruction manual of your car for assistance.


IMPORTANT! Do not place objects in the foot area in front of the child seat.



Extract the support leg until it is up to the vertical position.




Release the ISOFIX connectors lock. Both clamping can be adjusted independently. Press both buttons simultaneously and remove the ISOFIX connectors from the base to the limit switch).




The ISOFIX connectors must stop in the ISOFIX anchor points of the car seat with an audible "click". Make sure the base remains firmly in place by trying to extract it from the ISOFIX connection guides. The GREEN safety indicator must be clearly visible on both ISOFIX release buttons.

INSTRUCTION MANUAL


EN



Push the base towards the backrest until it is completely aligned with the backrest.




Make sure the support leg is fixed in a vertical position. Press the adjustment button: extract the support leg until it touches the vehicle floor. The support leg indicator on the foot will appear GREEN.

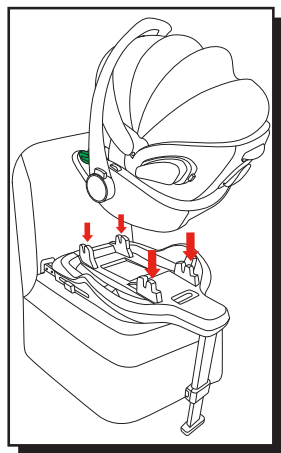

Fixing the Infant Carrier to the Base

IMPORTANT! Make sure the surface of the base is clear from free objects and the child is secured with the integrated harness system in order to guarantee the correct installation of the base in the vehicle.

- Make sure that both locking bars (6) are locked at the ISOFIX anchor points (A) of the car seat.
- Place the infant carrier on the base, with the front towards the backrest of the seat.

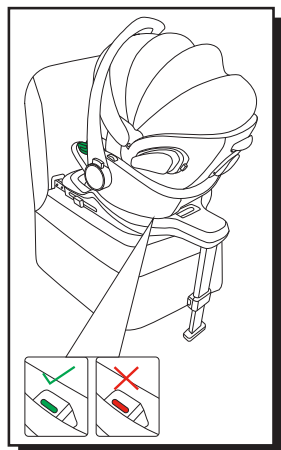


- Check that the base indicator is GREEN.

If the indicator is not GREEN, the infant carrier is NOT currently locked. If necessary, repeat the procedure.


INSTRUCTION MANUAL

Infant Carrier Removal

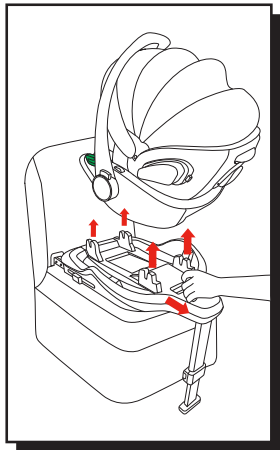


Pull the release button to unlock the Infant carrier and lift the Infant carrier with the handlebar. The base indicator will turn to RED.

Removing the Base from the Vehicle



- Unlock both ISOFIX connectors by simultaneously pressing the buttons and extract them from the vehicle's ISOFIX connection guides.
- Remove the base from the ISOFIX anchor points.
- Return the connectors to the original position.
- Press the adjustment button to return the support leg to its original position and then fold it to save space.

Adjusting the side protectors

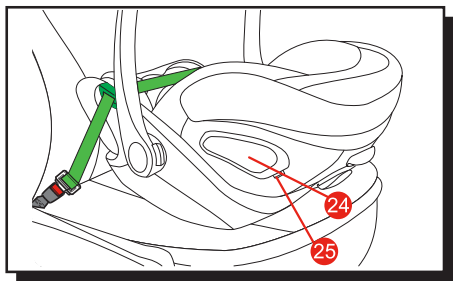


The «Linear Side-impact Protection» (L.S.P.) is built into the car seat. This system enhances the safety of your child in the event of a side crash. In order to achieve the best possible protective effect, unfold the L.S.P. (24) as far as possible towards the vehicle door closest to the car seat. To Release the L.S.P. push the marked area (25) on the L.S.P. If it's not possible to completely unfold the L.S.P. with a closed vehicle door, you may as well use the infant car seat with a closed L.S.P.

NOTE! Ensure that the extendable part locks in place with an audible "CLICK".

The L.S.P. can be completely folded back into initial position if you pull on the marked area (press 25 first, then press 24).


NOTE! When using the car seat on a middle position in the vehicle, it's prohibited to fold out the (L.S.P.) device.

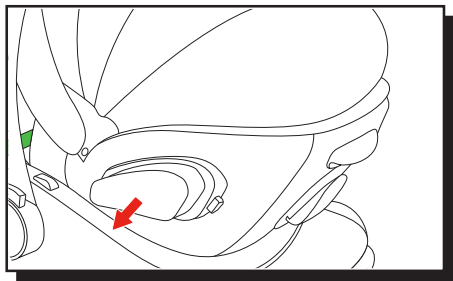

INSTRUCTION MANUAL

EN

Correct installation of the infant car seat

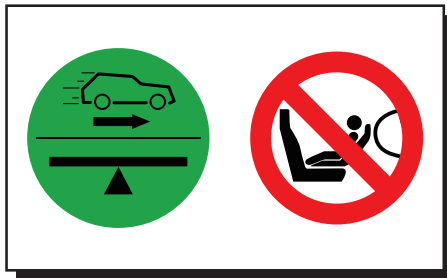


NOTE! The infant car seat is exclusively made for forward facing car seats, which are equipped with ISOFIX (Optionaly) or with a 3-point belt system according to UN R16 (see chapter «Correct position in the vehicle»).

To ensure your baby's safety, check that:

the infant car seat is secured with the child facing the rear of the vehicle,
the infant car seat is only used on the front passenger seat if the front airbag is deactivated,
the infant car seat is either fastened with the vehicle belt or with the base (OPTIONALY) (see chapter «Installing the infant car seat with vehicle belt» or «Connecting the infant car seat with base»).

If possible, the L.S.P. has been folded out on the side nearest to the car door, in order to achieve the best possible protective effect.


Removing the cover

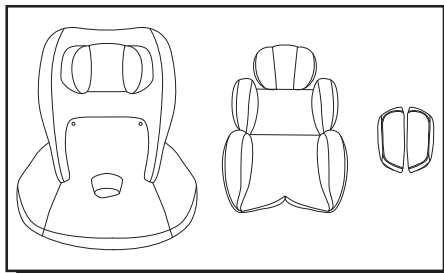

Removal

The cover consists of 6 parts: 1 backrest cover, 1 leg support cover, 1 headrest cover, 2 shoulder pads and a newborn inlay. To remove, please apply the following procedure: Undo the belt buckle. Remove both shoulder pads from the belt. Pull off the headrest cover from the headrest. Undo both press studs between the backrest cover and leg support cover. Thread the belt buckle out of the leg support cover and then remove it. Undo the press stud (36) behind the sun visor. Now you can remove the backrest cover.

! WARNING! The infant car seat must under no circumstances be used without the cover.

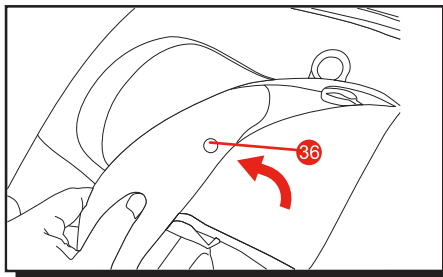

Attaching the cover

NOTE! Ensure to not twist or mix up the shoulder belts. Follow the steps described above but in reverse order in order to re-fasten the cover.


INSTRUCTION MANUAL

Cleaning and care

It is important to use an original seat cover only since the cover is an essential part of the function.

NOTE! Please wash the cover before you use it the first time. Seat covers are machine washable at max. 30°C on delicate cycle. If you wash it at higher temperature, the cover fabric may lose color. Please wash the cover separately and never dry it mechanically! Do not dry the cover in direct sunlight! You can clean the plastic parts with a mild detergent and warm water.


- Plastic parts can be cleaned with a mild detergent and warm water.
- All important parts of the base must be checked regularly to verify that they are not damaged.
- All mechanical components must work properly.
- This type of product requires careful and regular maintenance by the user.
- Protect the product from atmospheric agents, water, rain, snow. If necessary, immediately dry all the metal parts in order to avoid the formation of rust.
- DO NOT store the product if it is wet. DO NOT leave in humid environments. Mold is formed when a product is left in humid environments without a circulation that can dry the surface.

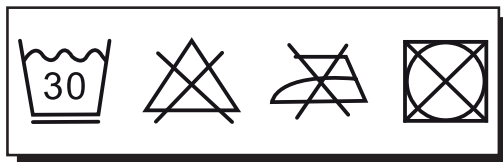

! WARNING! Please do not use chemical detergents or bleaching agents under any circumstances!

! WARNING! The integrated harness system cannot be removed from the baby seat. Do not remove parts of the harness system.

Adjusting the reclining position

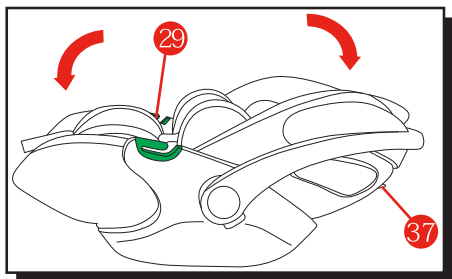

! WARNING! The infant car seat must only be reclined outside of the vehicle.


The car seat can be put into the reclining position by pulling the release button (37) at the same time as pushing the back section down. Ensure that the seat has been correctly locked in place in the reclining position. The position is permitted exclusively for use outside of the vehicle, for example on a stroller, and must not be used in a vehicle under any circumstances.

NOTE! Do not undertake any adjustments to the seat setup while the vehicle is in motion. To get back to the sitting position, press the unlocking button while pulling the back section up until you hear the lock "CLICK".

INSTRUCTION MANUAL

EN

Travel system

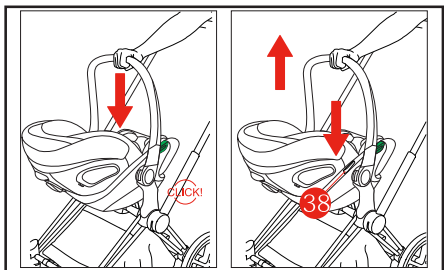

Follow the instruction manual for your stroller! You may attach the infant car seat on any approved stroller.

Click the infant car seat onto the approved adapter with the child looking towards the parent. Make sure the infant car seat audibly locks in place on both sides. Always check that the infant car seat is firmly connected to the stroller. To unlock, press and hold both release buttons (38) on the infant car seat and lift it.

NOTE! Please check compatibility of the infant car seat with your stroller.

What to do after an accident

! **WARNING!** An accident may cause damage to the car seat that is not visible to the naked eye. The car seat is not suitable for further use after a car accident.

Product lifespan

This child seat has been designed to be able to fulfill its intended functions by ordinary use for a product life span of approx 7 years. Gradual wear of the plastic, for example caused by exposure to sunlight (UV), can cause slight deterioration of the product's properties. Since very high temperature fluctuations and other unforeseeable stresses are common in vehicles, it is necessary to observe the following points:

If the vehicle is directly exposed to strong sunlight for long periods, the child seat must be removed from the vehicle or covered with a light cloth.

Check all plastic and metal parts of the seat regularly for damage or change of shape or color.

If you notice any change in the child seat, the seat must be disposed.

Changes to the fabric, especially fading, are normal when used in a vehicle and do not impair the seat's function.